



Model No. 14 BB E
Instant Recovery® Fryer

PROJECT _____

QUANTITY _____

ITEM NO. _____

Standard Features:

- ▶ 15.5 kW input for cooking up to 72 lbs. of frozen french fries per hour
- ▶ Instant Recovery® for high production
- ▶ Stainless Steel cabinet
- ▶ Polished Stainless Steel drawn pot with seamless coved corners uses 24% less oil
- ▶ Extra large Cold Zone
- ▶ Saves on oil costs/cooks at lower temperatures
- ▶ Melt cycle

Options:

- Battery
- Triple Size Baskets
- Rear Drain
- Casters
- Thermostat Seal
- Portable Filter, Central Filter (CF14SE), Safe & Easy® Filter
- Security Package
- Cover
- 17" Flue Riser



The 14 BB Fryer is ideal for multi-product use. The 14 BB allows you to cook up to 72 lbs. of frozen french fries per hour with an input of 15.5 kW rated at 240 volts.

Keating saves oil costs in three ways:

- BETTER FRY POT DESIGN
- LARGER COLD ZONE
- INSTANT RECOVERY®

1. The seamless coved corners of the deep drawn frying vessel with built-in elements requires 24% less oil while giving the production of a 50 lb. fryer.
2. The Keating frying vessel is 27% Cold Zone, the food particles collected in the cold zone are unheated and therefore do not carbonize and contribute to premature shortening breakdown.
3. Keating's "INSTANT RECOVERY"® feature means frying at lower temperatures (325° – 335°F) extending oil life while enhancing product quality.

• **Oil Capacity - 44 lbs.**

Easy to clean

Keating uses only 304 stainless steel in its frying vessel design and polishes each vessel. The smoother the surface, the less carbon build-up occurs, making cleaning easier. A full one inch front drain allows easy draining of oil.

Safety controls ensure safe and accurate cooking. The patented and precise thermostat controls cooking temperatures to ± 3°F. Hi-Limit control protects against the oil and fryer overheating.

Each fryer goes through a rigorous 100% test before shipping with every component carefully checked. The actual temperature test chart is included with each fryer.

Special Order Options

Keating gives you the widest range of options to ensure your fryer is exactly suited to your needs.



As continuous product improvement occurs, specifications may be changed without notice.

DATE _____

APPROVAL _____

SIGNATURE _____

www.keatingofchicago.com


14 BB Electric Instant Recovery® Fryer

"Serving Those Who Serve The Very Best"®

KEATING
OF CHICAGO, INC.

Model No. 14 BB E Instant Recovery® Fryer

A minimum of 24" at the front of the unit should be allowed for servicing and operation; a minimum of 6" on each side and at the rear of each unit for combustible materials.

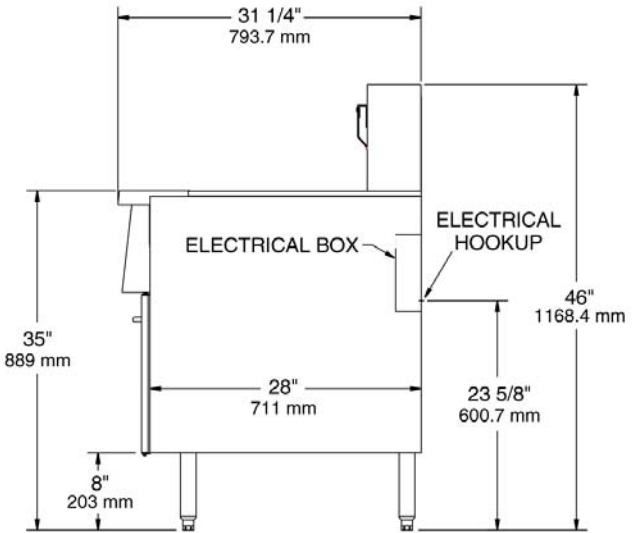

SPECIFICATIONS

Fryer Vessel - 18 gauge stainless steel with coved seamless corners and a shortening capacity of 44 lbs. Equipped with three stainless steel electric elements, spaced above the bottom of the vessel so that the bottom is unheated and the food particles collecting in the bottom zone are unheated and therefore do not carbonize. The vessel is polished to inhibit carbon buildup and facilitate easy clean-up. The bottom of the vessel slopes toward the front, and is equipped with a 1" Teflon core 1/4 turn drain valve, so the shortening can be drained into a receiving vessel placed in front of the fryer.

Splashdeck - 16 gauge, 304 stainless steel. It slopes toward the shortening containing vessel.

Splashback - 18 gauge, 304 stainless steel. It completely covers the side of the flue.

Cabinet - 18 gauge stainless steel. Rigid in construction, with four 8" adjustable legs. The cabinet door is made of 22 gauge 304 stainless steel. The door covers the front of the cabinet from the bottom of the fryer to the fryer panel, and the full width of the cabinet. Above the panel is a canopy. No additional space is required for the door to open a full 90 degrees.

Electric Elements - Three electric elements, made of polished stainless steel.

Thermostat - Close range, hydraulic type, is accurate to ±3°F from 300° to 350°F with stainless steel bulb. Application of this thermostat is patented by Keating.

Hi-Limit Control - Manually resettable type with stainless steel bulb.

Melt Cycle - Standard on "BB" fryers, allowing the safe melting of solid shortening. Fryer is to be left in the Melt Cycle mode until oil completely covers elements.

Indicating Lights & Switches - Power on switch, power on light, fry off melt switch.

Standard Accessories - Includes one pair 4 mesh baskets, grid screen over elements, drain clean out rod and sample of Keating Klenzer.

Electric Specifications - 3-wire terminal block, with ground provided for field wiring. (See local codes for supply line requirements.)

Special Order Options may include battery, triple size baskets, rear drain, casters, thermostat seal, portable filter, central filter (CF14SE), Safe & Easy® Filter, 17" flue riser, security package and cover.

ELECTRICAL REQUIREMENTS

| MODEL | 208V | | 220V | | 240V | | 380V* | | 480V* | |
|-------------------|------|----------|------|----------|------|----------|-------|----------|-------|----------|
| | KW | Amps | KW | Amps | KW | Amps | KW | Amps | KW | Amps |
| 14 BB E 208-240/1 | 11.7 | 56 | 13.1 | 60 | 15.5 | 65 | 13.1 | 35 | 15.5 | 32 |
| 14 BB E 208-240/3 | 11.7 | 33-33-33 | 13.1 | 34-34-34 | 15.5 | 37-37-37 | 13.1 | 20-20-20 | 15.5 | 19-19-19 |

* 380V or 480V are special order items.

DIMENSIONS**

| Height | Depth | Width | Weight |
|--------|---------|---------|----------|
| 46" | 31 1/4" | 15 3/8" | 180 lbs. |

** Dimensions are the same for Model 14 BB E Safe & Easy: Height, 46", Depth 31 1/4" and Width 15 3/8". Weight is N/A. As continuous product improvement occurs, specifications may be changed without notice.

www.keatingofchicago.com

14 BB Electric Instant Recovery® Fryer