



Hot Plate

PROJECT _____

QUANTITY _____

ITEM NO. _____

Standard Features:

- ▶ Available in gas only with two or four burners
- ▶ Features 15,000 BTU/hr. input
- ▶ Compact size is perfect for Kiosks

Options:

- Extended Fronts
- Matching Dummy Cabinets
- Spark Ignition



MG-2 Gas

Keating heavy duty Hot Plates are designed to provide the energy input needed to heat up quickly, and the control to maintain temperature.

Performance

The MG-2 and MG-4 gas models deliver 15,000 BTU/hr. input per burner at 4" water column pressure.

Compact size

The MG-2 is only 13" wide by 30" deep. The MG-4 is 26" wide by 30" deep. A perfect size for equipment stands or in a Keating Custom Line-Up, the Hot Plate complements any kitchen decor.

Rugged design

The Hot Plate gas models feature removable grates and drip pans and stainless steel burners.

Options

Options include extended fronts, matching dummy cabinets and spark ignition.



DATE _____

APPROVAL _____

SIGNATURE _____

As continuous product improvement occurs, specifications may be changed without notice.


www.keatingofchicago.com

Hot Plate



Hot Plate

A minimum of 24" at the front of the unit should be allowed for servicing and operation; a minimum of 6" on each side and at the rear of each unit for combustible materials.

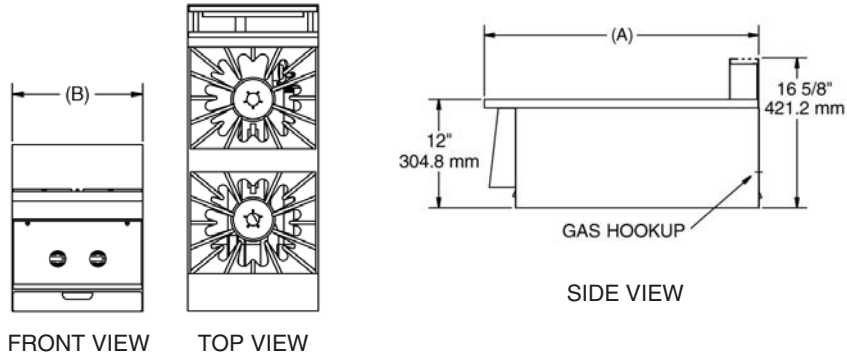

SPECIFICATIONS

The Keating Hot Plate is available with 2 (MG 2) or 4 (MG 4) burners in a cabinet with a splashback. Each burner is rated at 15,000 BTU/hr.

Burner - Stainless Steel burners, rated at 15,000 BTU/hr. The MG 4 has four burners.

Grates - Cast iron grates, removable for cleaning.

Burner Control - Manual gas valves (infinite controls) are mounted in the front with constant pilots. Spark igniters are available.

Drip Tray - The drip tray is removable from the front for easy cleaning.

Gas Connection - 3/4" NPT male connection located in the rear of the unit.

Note: Special order may include Spark Ignition.

INSTALLER - Check plumbing and gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on. Supply pressure must NOT be above 13.84" WC or gas valve damage may occur.

GAS/ELECTRICAL REQUIREMENTS AND DIMENSIONS*

MODEL	BURNER	BTU INPUT/ BURNER	Height	(A) Depth	(B) Width	Weight
MG 2 30 CP NAT GAS	2	15,000	16 5/8"	30 1/2"	13"	140 lbs.
MG 2 30 LP GAS	2	15,000	16 5/8"	30 1/2"	13"	140 lbs.
MG 4 30 CP NAT GAS	4	15,000	16 5/8"	30 1/2"	26"	150 lbs.
MG 4 30 LP GAS	4	15,000	16 5/8"	30 1/2"	26"	150 lbs.

*All Models have a 12" Working Height

As continuous product improvement occurs, specifications may be changed without notice.

www.keatingofchicago.com

Hot Plate