



# Custom Drop-In Electric Pasta™ System

PROJECT \_\_\_\_\_

QUANTITY \_\_\_\_\_

ITEM NO. \_\_\_\_\_

**Standard Features:**

- ▶ Available in electric 208-240V, single or three phase
- ▶ Saves on time and space
- ▶ Automatic water fill
- ▶ Stainless Steel cabinet
- ▶ Polished Stainless Steel fryer vessel
- ▶ Patented cook cycle
- ▶ Two digital timers for precise cooking control
- ▶ Starch overflow drain

**Options:**

- Individual Serving Baskets
- 380 or 480 Voltage



Keating offers a Custom Pasta™ Cooking System designed to meet the needs of every kitchen. With our Drop-In Pasta™ Cooking System, water comes to a rolling boil in less than 10 minutes. The Drop-In Pasta™ Cooking System can cook up to six pounds of dry pasta per load, yielding 110 lbs. of pasta per hour.

**High production**

The Custom Pasta™ Cooking System has the highest energy input of any unit on the market today. A “pre-heat” cycle utilizes the full energy input for fast pre-heating. Keating’s patented “cook cycle” manages energy input, which maintains a rolling boil throughout the cooking process. This means you can more easily accommodate rush orders. The starch overflow drain eliminates starch build up for better cooking results.

**Safe and easy to use**

The Custom Pasta™ Cooking System is a self-contained, self-filling and self-draining system. Keating’s water auto-fill feature automatically refills the cooker when water level is low without affecting the boil. A panel of indicating lights for water filling, power or pilot on, and elements on monitors the status of the unit at all times.

**Versatility**

The Custom Pasta™ cooks more than just pasta - it’s ideal for boiling seafood, blanching vegetables, poaching eggs, using to rethermalize sauces and packaged foods and much more. With Keating’s wide assortment of baskets available, you can prepare individual servings as well as large portions, plus you can cook different shapes and sizes of pasta to perfect consistencies.



**Intertek**  
9902091



**Intertek**  
9902091



As continuous product improvement occurs, specifications may be changed without notice.

DATE \_\_\_\_\_

APPROVAL \_\_\_\_\_

SIGNATURE \_\_\_\_\_


[www.keatingofchicago.com](http://www.keatingofchicago.com)

Custom Drop-In Electric Pasta™ System




## Drop-In Electric Pasta™ System


A minimum of 130 square inches unobstructed vent area near pasta cooker required for combustion.

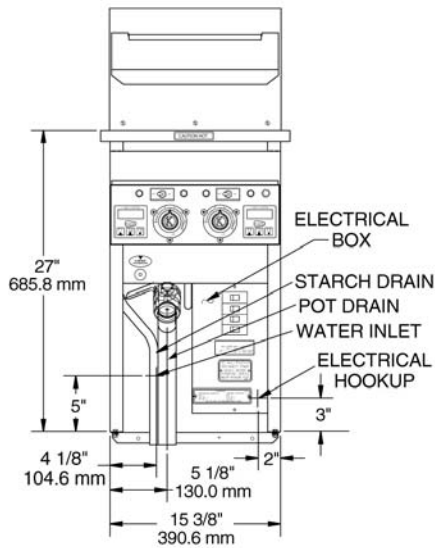


FRONT VIEW

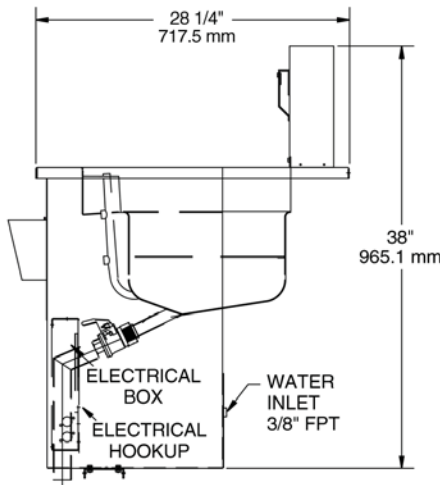

SIDE VIEW



CUTOUT FOR COUNTER TOP

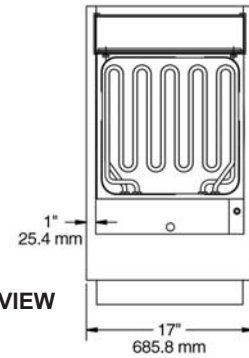

TOP VIEW

Custom Drop-In Electric Pasta™ System

**Description** - The Keating Drop-In Pasta™ System can be ordered in electric 208-240 Voltage in single or three phase.

**SPECIFICATIONS**

Water vessel is made of 18 gauge highly polished stainless steel. The electric model holds 7 gallons of water.

**Cabinet** - The cabinet, including the splashback and the splashdeck, is made of 16 gauge stainless steel.

**Thermostats** - Patented "cook cycle" features dual thermostats, to maximize preheat while controlling the boil. The range is 100° to 250°F.

**Water Auto-Fill** - Two sensors control the water auto-fill. The upper sensor activates the solenoid valve to fill the unit to the proper level. The lower sensor prevents the burners/elements from coming on if the water level is below it to prevent heat damage to the unit. The unit also has a manual fill button to allow additional water to flow into it when needed and has a standard 3/8 inch female pipe connection on the rear. Maximum incoming water pressure cannot exceed 60 psi.

**Starch Overflow** - Starch overflow is located in the front of the water vessel and ensures excess starch and foam are regularly drained off. Used in conjunction with the manual water fill, it can also permit flushing of greater amounts of water when needed.

**Indicating Lights** - Indicating lights located on the front control panel indicate water filling, power on or pilot on and elements on.

**Drain** - The drain terminates 5" from the floor and requires an open or trapped drain, per local and national codes.

**Baskets** - Baskets are perforated and are available in both full and split styles.

**Timers** - Each unit comes with two 15 minute digital solid state timers.

**Electrical Connection** - A 120 volt cord with 3-prong grounded plug is supplied with all gas units. Electric units are available in 208-240V single or three phase. Connection is made to a field wiring terminal block (see local codes for supply line requirements). There is a separate field wiring terminal for the 120V control panel.

**Special Order Options** - Individual serving baskets, and 380 or 480 voltage.

**ELECTRICAL REQUIREMENTS AND DIMENSIONS**

MODEL	KW @ 240V	AMPS @ 220V 1Ø 3Ø	Height	Depth	Width	Weight
14 PASTA DI 208-240	15.5	65 32-56-32	38"	28 1/4"	17"	125 lbs.

Note: See drawing for specific utility notes, drain location and cut-out dimensions for counter top.

**NOT FOR OUTDOOR INSTALLATION - NOT FOR DOMESTIC INSTALLATION**

As continuous product improvement occurs, specifications may be changed without notice.

[www.keatingofchicago.com](http://www.keatingofchicago.com)