



SERVICE INSTRUCTIONS

1-800-KEATING • keatingofchicago.com

Bob Evans
FARMS®


THERMOSTAT CALIBRATION SERIES 2000 GAS FRYERS

Calibration is not covered under warranty.

Tools Needed:


- Accurate fryer thermometer
- Standard screwdriver
- Standard Phillips Head screwdriver

Note: Thermostat is pre-set to 350° at Factory.

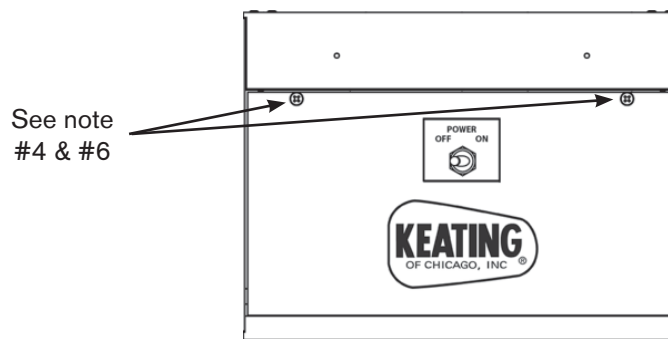

INSTRUCTIONS:

1. Turn on fryer.
2. Allow fryer burners to cycle on and off three times.
3. Place an accurate thermometer in the oil. Locate thermometer in same position for every calibration. Left rear corner of fryer vessel is recommended.
4. Remove (2) Pan Head Phillips screws from control panel front. Put screws in secure place. Lower control panel front.



Thermostat Calibration

Thermostat knob removed to reveal calibration screws.

5. If temperature of fryer is found to be less than 15°F off, remove the thermostat knob. Loosen the two screws in the thermostat dial plate. Replace knob. Reset the dial plate to match the thermometer reading.
6. Put control panel in upright position. Fasten (2) Pan Head Phillips screws into holes on control panel.

For calibration over 15°F difference, contact a qualified service company.